

Updating instructions for Vega S95


A. SD updating method.


1. Download the firmware from www.tronsmart.com and unzip it

You' ll see such file name  , please don' t unzip it any more.

2. Find a SD card more than 1Gb and already format into FAT32, copy the above file to root directory.

3. Insert the SD card to SD slot. Then connect power adapter, then enter update&backup


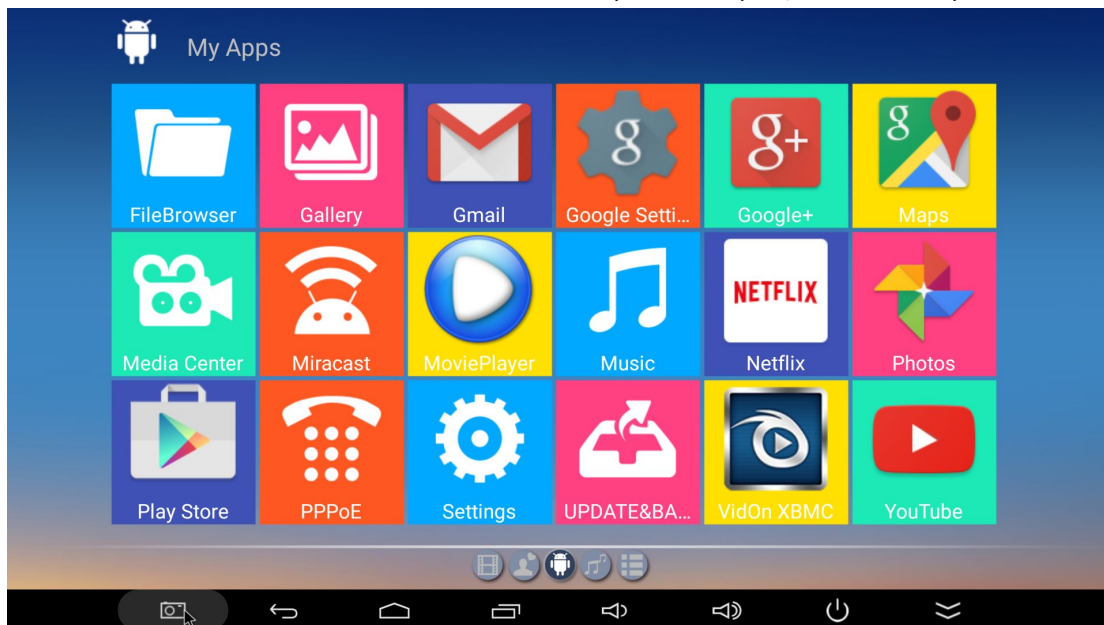


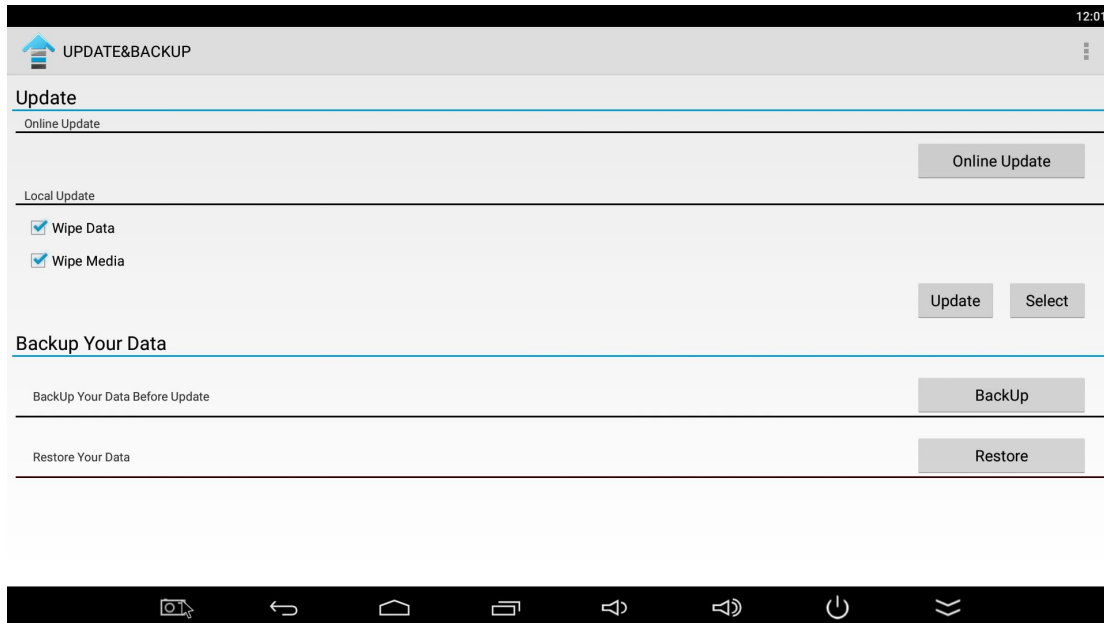

If you want to keep your previous data, please don't choose wipe data and wipe media. If you want to clear all user data, please choose wipe data and wipe media. Then click the select to choose firmware.



3.Click Update, and your TV box will reboot, and start the update shortly showing the Android update animation

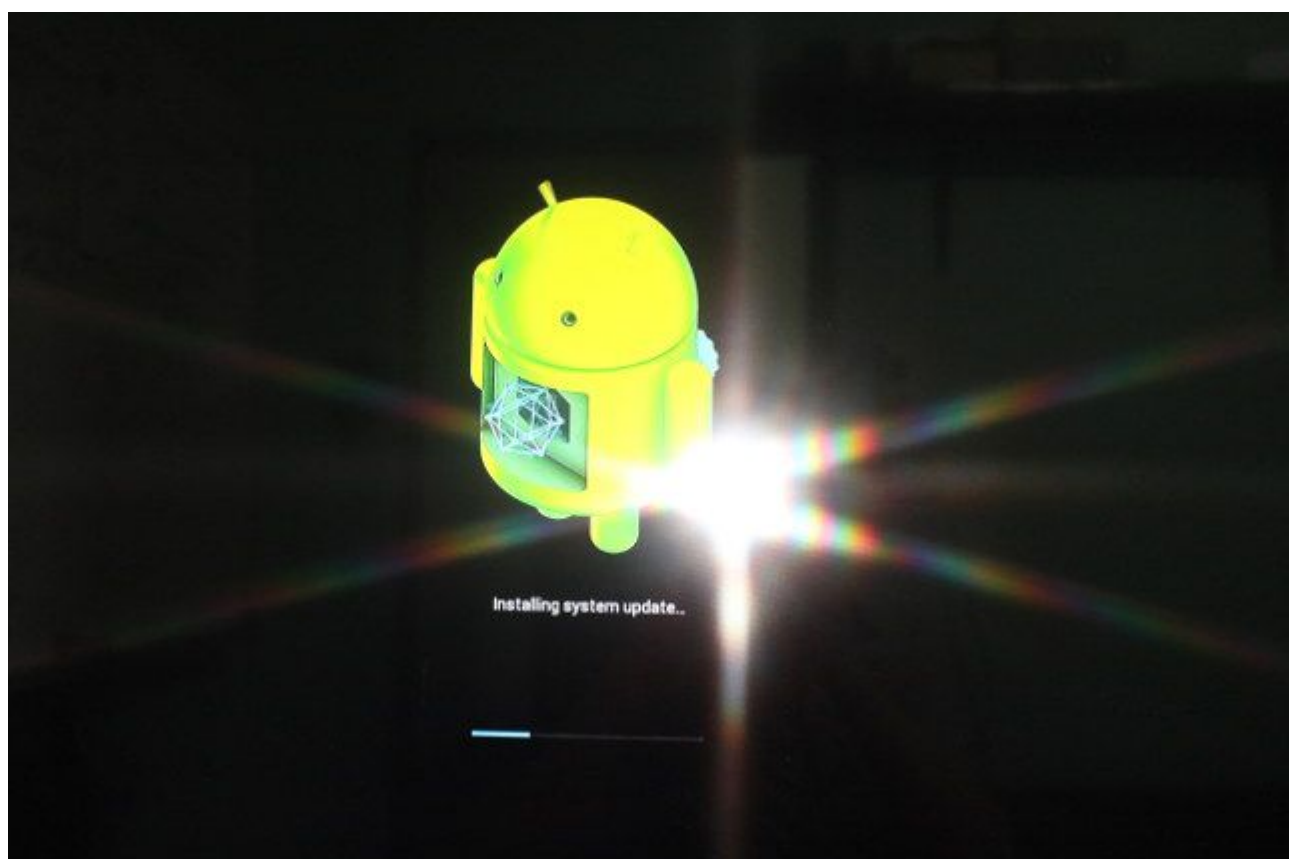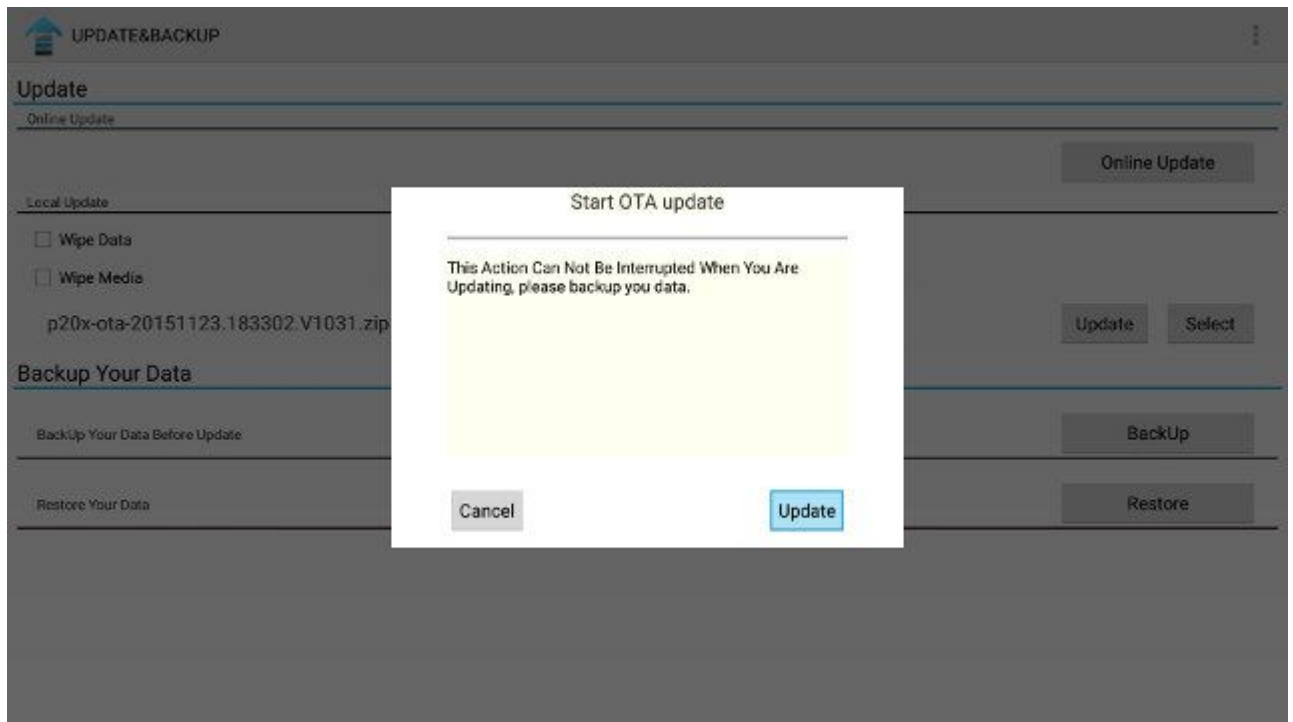

Please Be patient, and after a while your system will reboot and you'll see Tronsmart logo, update Android app, and load the Android Home Screen. You are ready to go.

B. Update on PC.


1. The USB burning tools, the updating instructions will pack together, please download.

extract the file:USB_Burning_Tool_v2.0.5.15.rar

and you will see an *.exe file, run it, and follow the instruction, it will help to install the burning tool on your pc.

PS: in order to make sure you don't have drivers problem, suggest you to install this tool in your pc first:<http://www.moborobo.com/>


2. Now run the USB burning tool, you will see this:

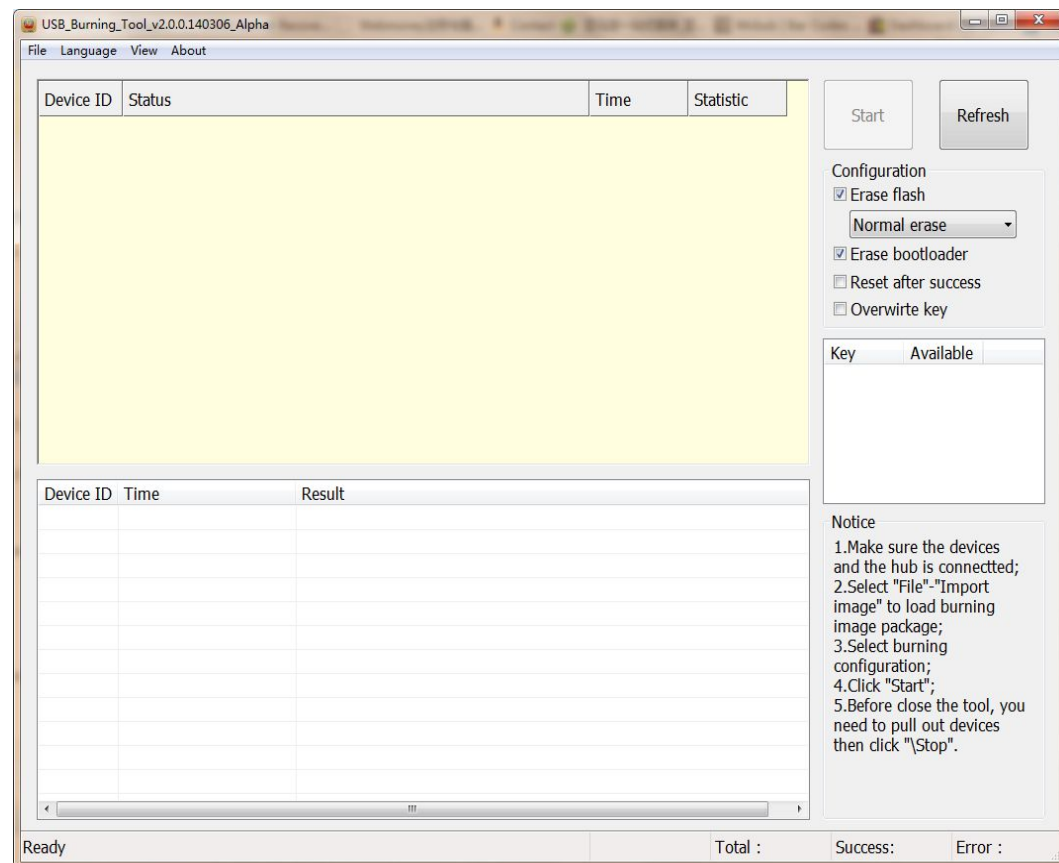


PS: If there is the a notice , the MAC key is zero, look at the following pictures. Please unzip the license copy the whole documents, to replace it at the installation location: C:\Program Files\Amlogic\USB_Burning_Tool(it' s location on my pc)



Click “file” and choose “import image”, choose the .img file you just download,

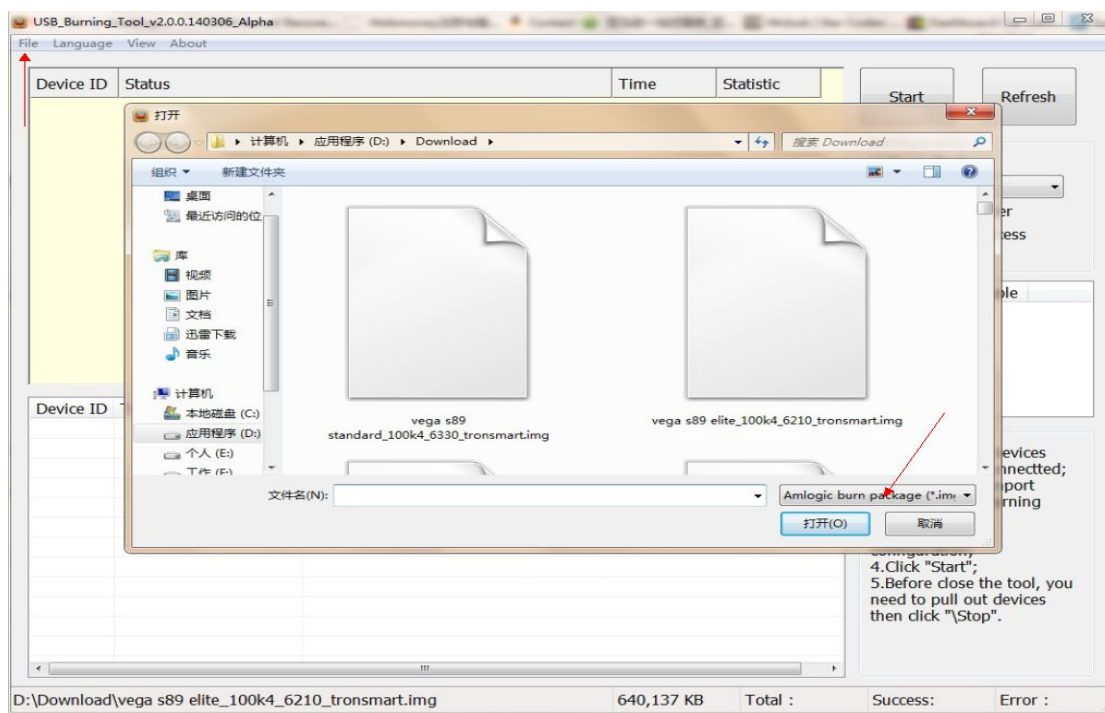

3. Now it's important step, Make sure your Vega S95 device is **power off**. Use the **Male-to-male USB** cable to connect between OTG port of vega S95 and PC.

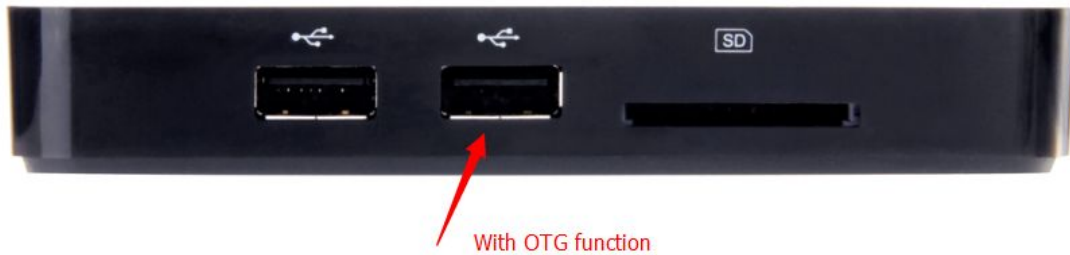

Use the toothpick to press the Reset button (On the bottom of S95, you can see Fn), **Hold and press** the reset button at the time , connecting the **power adapter** to vega S95:

PS: make sure you see connect successful, If not showing this connecting successful, please try the above steps more times.

设备ID	状态
HUB5-1	
HUB5-2	连接成功
HUB5-3	
HUB5-4	must see connecting successfull

烧录包校验

烧录固件校验，固件越大时间越长，

and then click start button to flash. It will take 5-8 mins to finish the flash.

PS; All tronsmart TV Box has OTA service. Please enter setting->more setting->about mediabox->system update. It will check the latest firmware and update.

Any questions, feel free to contact: support@tronsmart.com